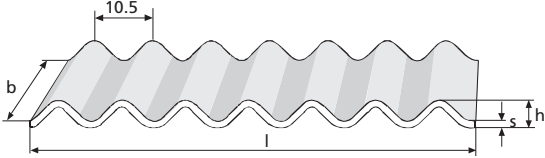



wellboard minimum

material	100% wood pulp, hot-pressed to form corrugated boards without the use of adhesives.
width	200 cm
length	440 cm
height	4,5 mm
thickness of material	1,0 mm
tolerances	l: ± 20 cm, b: ± 5 cm, h: $\pm 1,0$ mm, s: $\pm 15\%$
weight	$\sim 1,4$ kg/m ²
other formats	also available in the format 200 x 200 cm for prototypes and demonstrations.
	
item no.	5000
delivery period	1-2 weeks if in stock
packaging	22 x 22 x 206 cm, $\sim 15,3$ kg, per roll
processing	corresponding to other wood-based material can be cut, ground, perforated and varnished. please also note the technical instructions. pilot tests are highly recommended.
fire prevention	to adhere to din 4102-b1, wellboard has to be impregnated.
awards	„if material award 2005“ and „interzum award 2001“
samples of material	20 x 30 cm
information	www.well.de
last update	1 september 2005

well

A U S T E L L U N G S S Y S T E M G M B H
schwarzer bär 2 · 30449 hannover · germany
tel +49 (0)5 11 · 92 88 1-10 · fax -18
info@well.de · www.well.de

wellboard medium

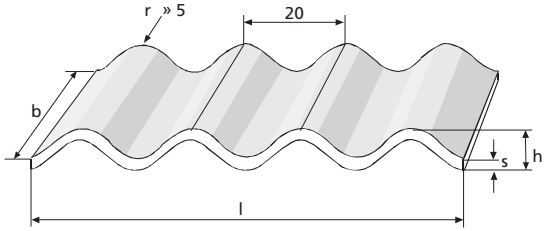
material	100% wood pulp, hot-pressed to form corrugated boards without the use of adhesives.
width	200 cm
length	520 cm
height	7 mm
thickness of material	2,0 mm
tolerances	l: ± 20 cm, b: ± 5 cm, h: $\pm 1,0$ mm, s: $\pm 15\%$
weight	$\sim 2,7$ kg/m ²
other formats	also available in the format 200 x 200 cm for prototypes and demonstrations.
	
item no.	5100
delivery period	1-2 weeks if in stock
packaging	32 x 31 x 208 cm, $\sim 33,1$ kg, per roll
processing	corresponding to other wood-based material can be cut, ground, perforated and varnished. please also note the technical instructions. pilot tests are highly recommended.
fire prevention	to adhere to din 4102-b1, wellboard has to be impregnated.
awards	„if material award 2005“ and „interzum award 2001“
samples of material	20 x 30 cm
information	www.well.de
last update	1 september 2005

well

AUSSTELLUNGSSYSTEM GMBH
schwarzer bär 2 · 30449 hannover · germany
tel +49 (0)511 · 92 88 1-10 · fax -18
info@well.de · www.well.de

wellboard maximum

material	100% wood pulp, hot-pressed to form corrugated boards without the use of adhesives.
width	315 cm
length	520 cm
height	8,5 mm
thickness of material	1,5 mm
tolerances	l: ± 20 cm, b: ± 5 cm, h: $\pm 1,0$ mm, s: $\pm 15\%$
weight	$\sim 2,1$ kg/m ²
other formats	also available in the format 200 x 200 cm for prototypes and demonstrations.

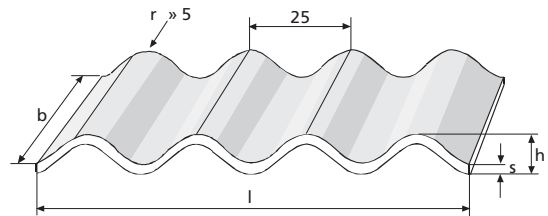


item no.	5200
delivery period	1-2 weeks if in stock
packaging	32 x 31 x 321 cm, $\sim 42,4$ kg, per roll
processing	corresponding to other wood-based material can be cut, ground, perforated and varnished. please also note the technical instructions. pilot tests are highly recommended.
fire prevention	to adhere to din 4102-b1 wellboard, has to be impregnated.
awards	„if material award 2005“ and „interzum award 2001“
samples of material	20 x 30 cm
information	www.well.de
last update	1 september 2005

well

A U S S T E L L U N G S S Y S T E M G M B H
schwarzer bär 2 · 30449 hannover · germany
tel +49 (0)5 11 · 92 88 1-10 · fax -18
info@well.de · www.well.de

wellboard alpha 800

material	100% wood pulp, hot-pressed to form corrugated boards without the use of adhesives.
width	315 cm
length	500 cm
height	12 mm
thickness of material	1.0 mm
tolerances	l: ± 20 cm, b: ± 5 cm, h: ± 1.0 mm, s: $\pm 15\%$
weight	$\sim 1,55$ kg/m ²
other formats	also available in the format 200 x 200 cm for prototypes and demonstrations.

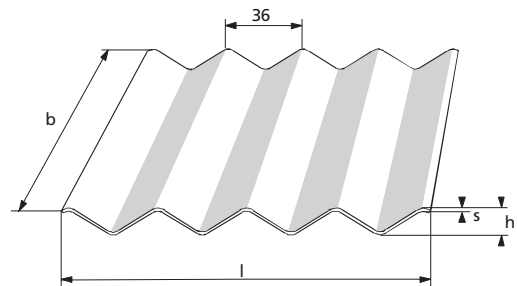


item no.	7970
delivery period	1-2 weeks if in stock
packaging	32 x 31 x 321 cm, $\sim 32,4$ kg, per roll
processing	corresponding to other wood-based material can be cut, ground, perforated and varnished. please also note the technical instructions. pilot tests are highly recommended.
fire prevention	to adhere to din 4102-b1 wellboard has to be impregnated.
awards	„if material award 2005“ and „interzum award 2001“
samples of material	20 x 30 cm
information	www.well.de
last update	1 september 2005

well

AUSSTELLUNGSSYSTEM GMBH
schwarzer bäR 2 · 30449 hannover · germany
tel +49 (0)5 11 · 92 88 1-10 · fax -18
info@well.de · www.well.de

wellboard gamma 500

material	100% wood pulp, hot-pressed to form corrugated boards without the use of adhesives.
width	200 cm
length	530 cm
height	7,5 mm
thickness of material	1,5 mm
tolerances	l: ± 20 cm, b: ± 5 cm, h: ± 1.0 mm, s: $\pm 15\%$
weight	$\sim 1,95$ kg/m ²
other formats	also available in the format 200 x 200 cm for prototypes and demonstrations.

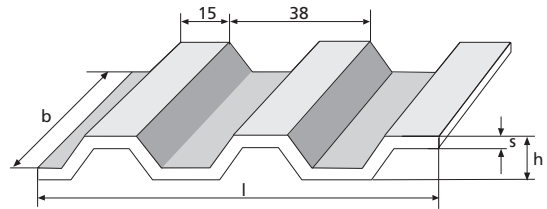

item no.	7190
delivery period	1-2 wochen by stock
packaging	32 x 31 x 208 cm, $\sim 25,7$ kg, per roll
processing	corresponding to other wood-based material can be cut, ground, perforated and varnished. please also note the technical instructions. pilot tests are highly recommended.
fire prevention	to adhere to din 4102-b1 wellboard has to be impregnated.
awards	„if material award 2005“ and „interzum award 2001“
samples of material	20 x 30 cm
information	www.well.de
last update	1 september 2005

well

AUSSTELLUNGSSYSTEM GMBH
schwarzer bär 2 · 30449 hannover · germany
tel +49 (0)5 11 · 92 88 1-10 · fax -18
info@well.de · www.well.de